


INSTALLATION INSTRUCTIONS

OCEAN MASTER MAX CANTILEVER
EASYDRIVE™ CRANK | AUTO-LIFT | AMBIATM LED LIGHTS

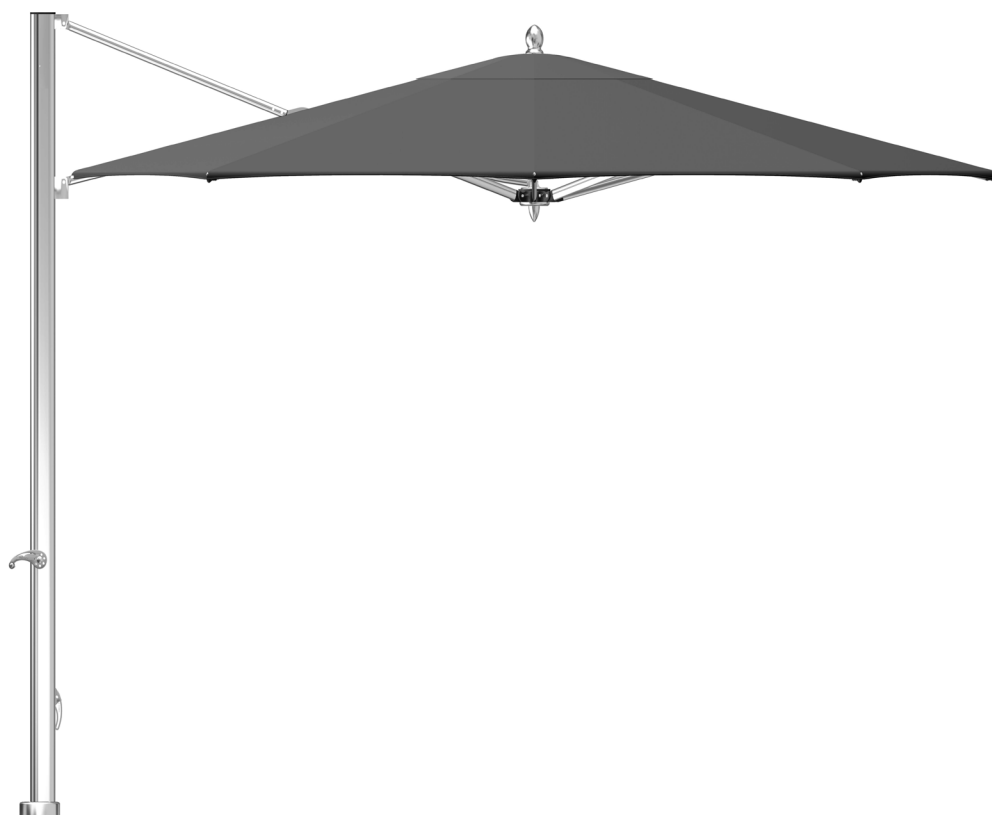

To protect your product, please read the operating instructions before opening the parasol.


EASYDRIVE™ CRANK | AUTO-LIFT | AMBIAT™ LED LIGHTS

Step 1

Remove all packaging from in and around parasol.


Step 2

Pull pin from cam lock and lift the handle to unlock.

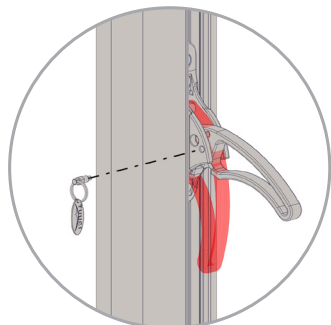


Step 3

Once you have leveled the security stem using the anchor installation instructions, slide the post beauty cover and parasol over the security stem (security stem is included with parasol).

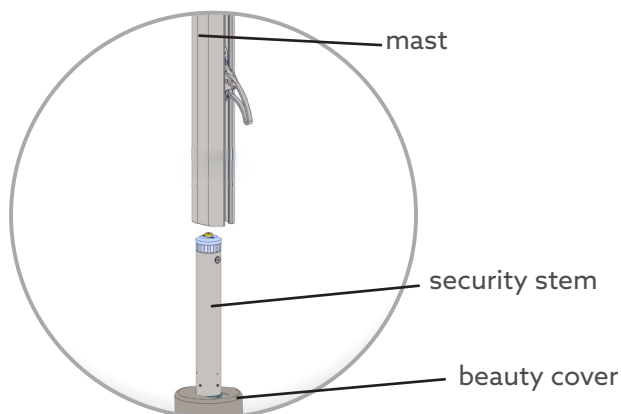


Step 4

Push cam lock handle down until it is locked into the security stem. Insert the pin into the lock handle.

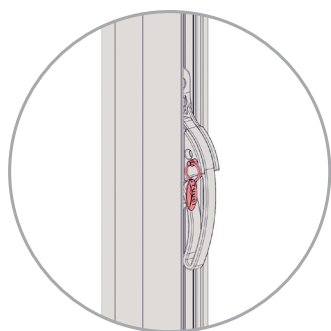

Step 5

Gently separate each individual rib from the center hub approximately 10 inches. If the rib does not move easily, do not force. Inspect the product for additional packaging.

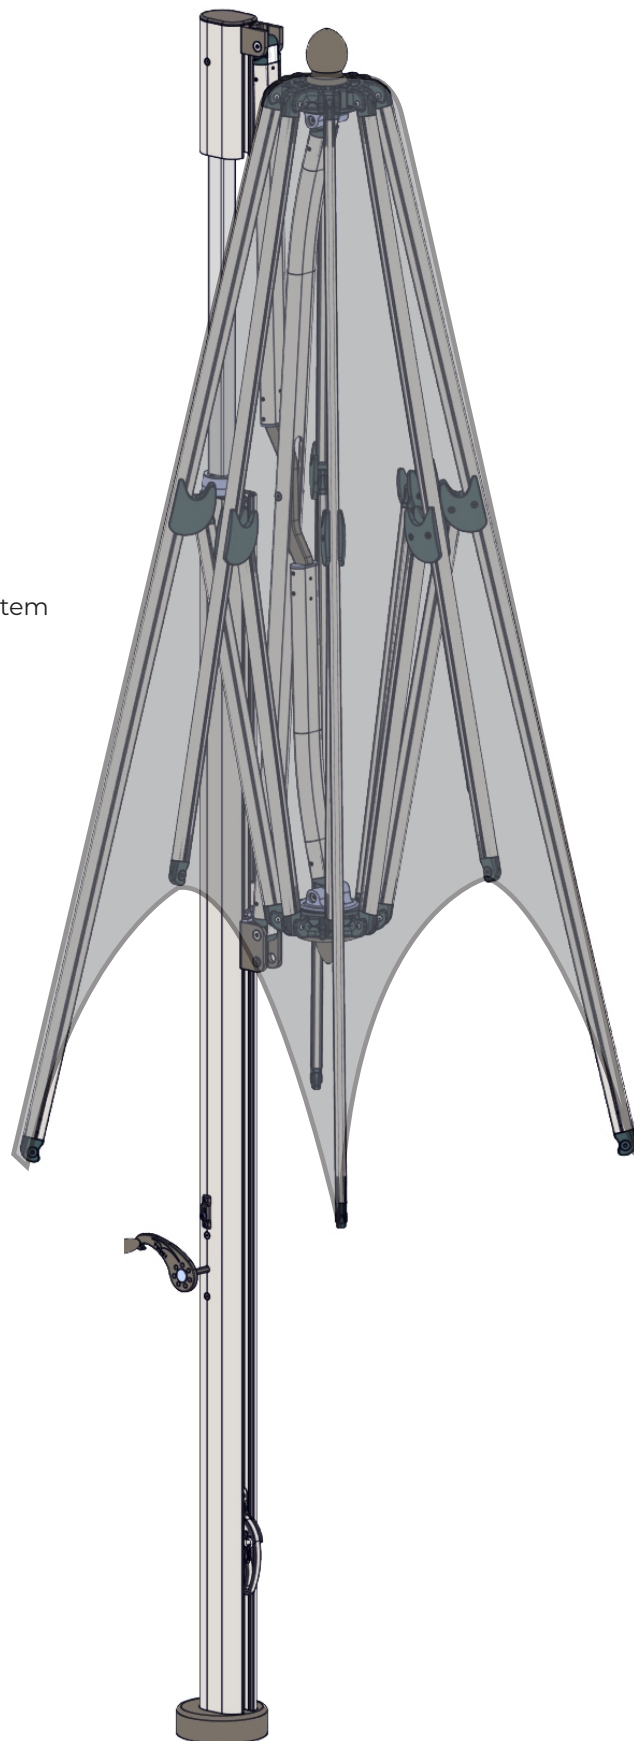

EASYDRIVE™ CRANK | AUTO-LIFT

EASYDRIVE™ CRANK SYSTEM see page 4



AUTO-LIFT ASSIST SYSTEM see page 5



EASYDRIVE™ CRANK

Step 1

Connect the parasol cable swage eye to the cable bracket on top of the bottom trolley cart using the provided security pin (figure a).

Note: If the cable does not have enough give to reach the bracket, (see step 2), pull the black rope untill the cable swage eye reaches the cable bracket on top of the bottom trolley.

Step 2

Set the mast lock in the open/up position (figure b).

Step 3


Insert the crank handle and turn clockwise to open the parasol (figure c).

You will know the parasol is fully opened/engaged when the auto-scope meets the mast (figure d).

Note: Your parasol may or may not come with high wind stabilizers (figure e).

Step 4

Once fully open, set the mast lock in the down/locked position and remove the crank handle when not in use (figure f).

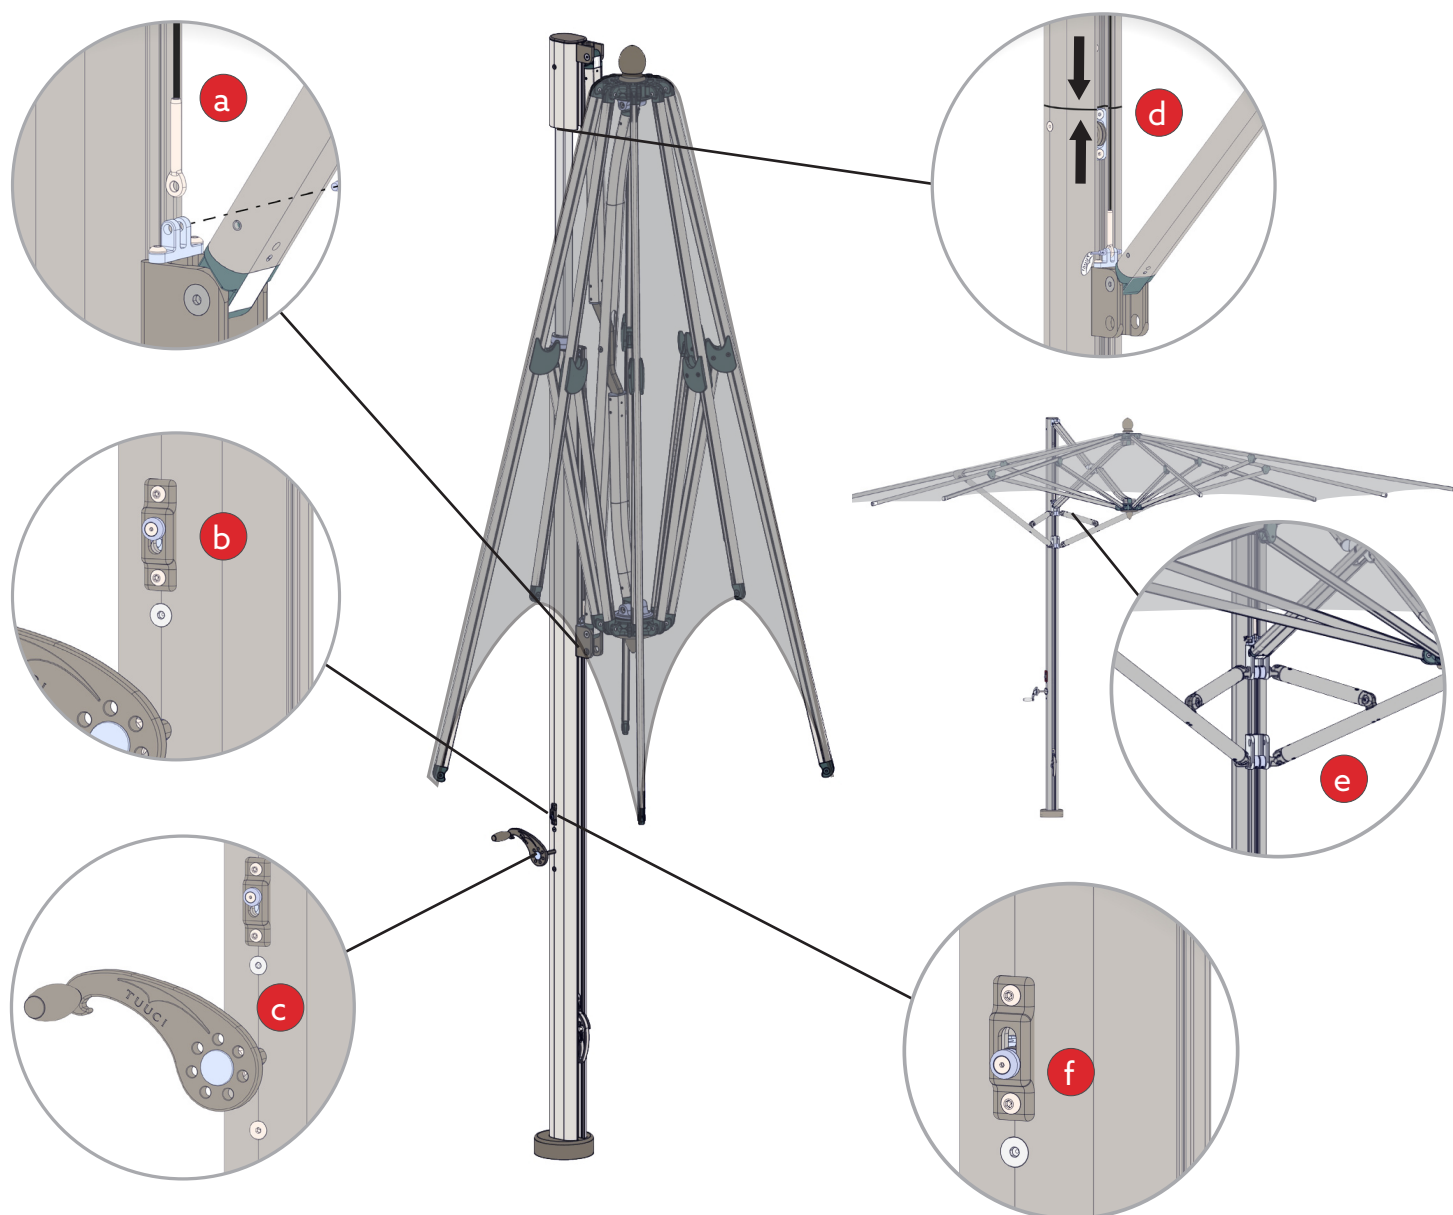


AUTO-LIFT

Step 1

TO OPEN parasol:

To open parasol, unlock the lever and push cart handle until it locks.

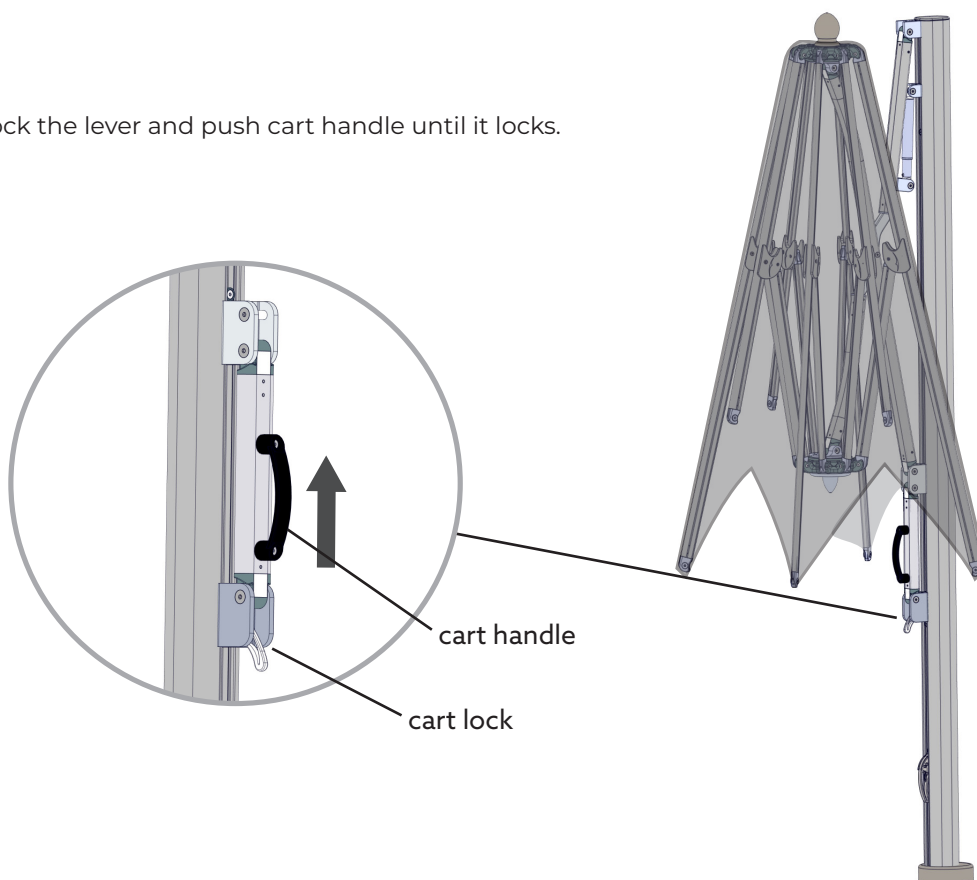

Step 2

TO CLOSE parasol:

To close parasol, unlock the lever by pushing cart handle upwards and pushing cart lock lever in. Then, slide down the cart by pulling down the cart handle.



AMBIATM LED LIGHTS

Lighting Specifications



Power Supply:	
Input Voltage	90 - 305VAC
Input Current	0.6A / 115VAC 0.3A / 230VAC
Output Voltage	12 VDC
Output Power	40 Watts

Step 1

Connect the electrical cord to the outlet.

Step 2

Tap plate once to power on-off, or touch and hold for light dimming control.

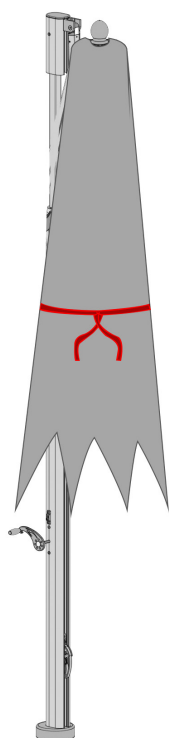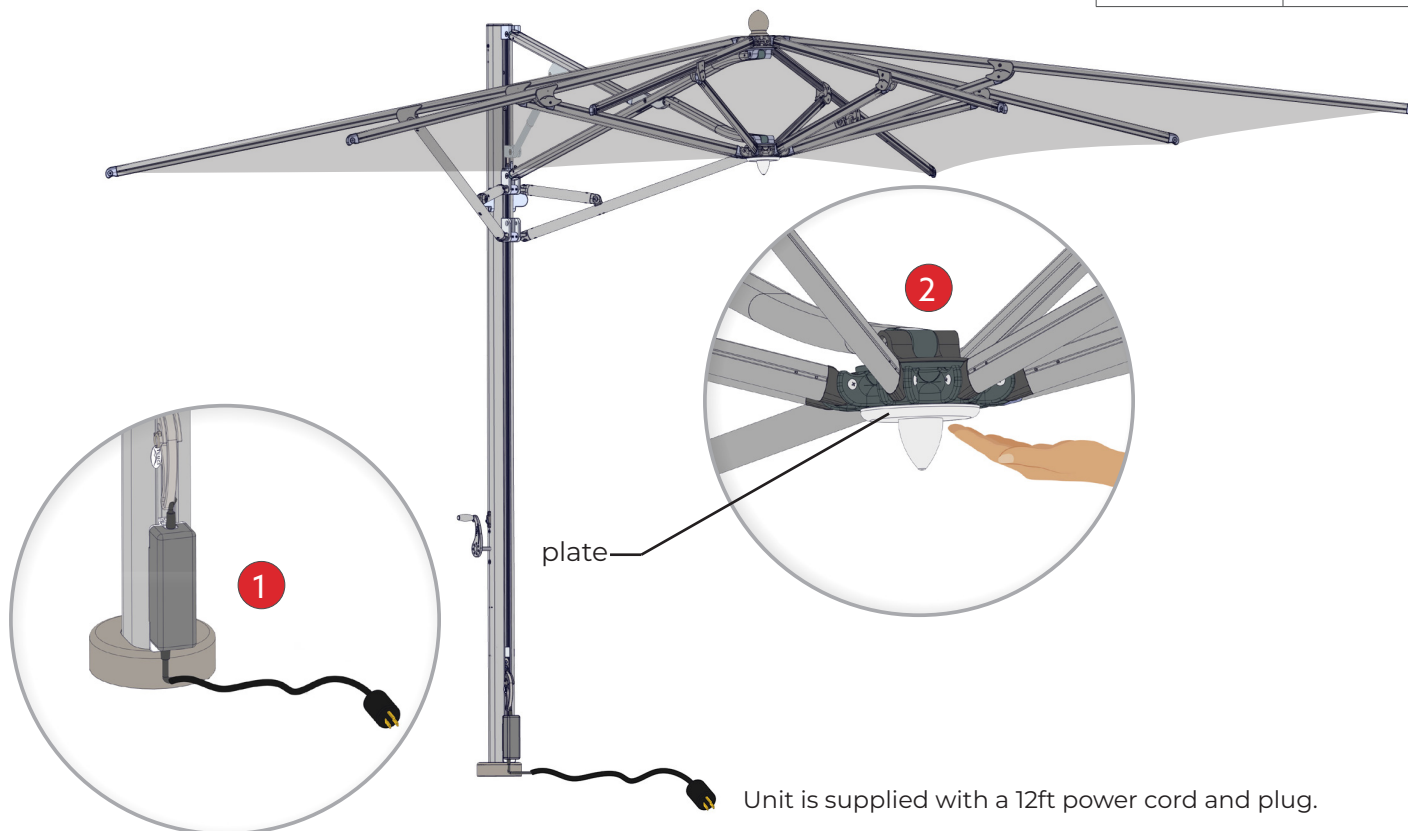

When not in use, the canopy should be carefully folded and secured with the tie-strap.

Note: Close parasol during wind conditions that exceed manufacturer's specifications.