


INSTALLATION INSTRUCTIONS

OCEAN MASTER MAX DUAL CANTILEVER
AMBIATM LED LIGHT | AUTOMATION

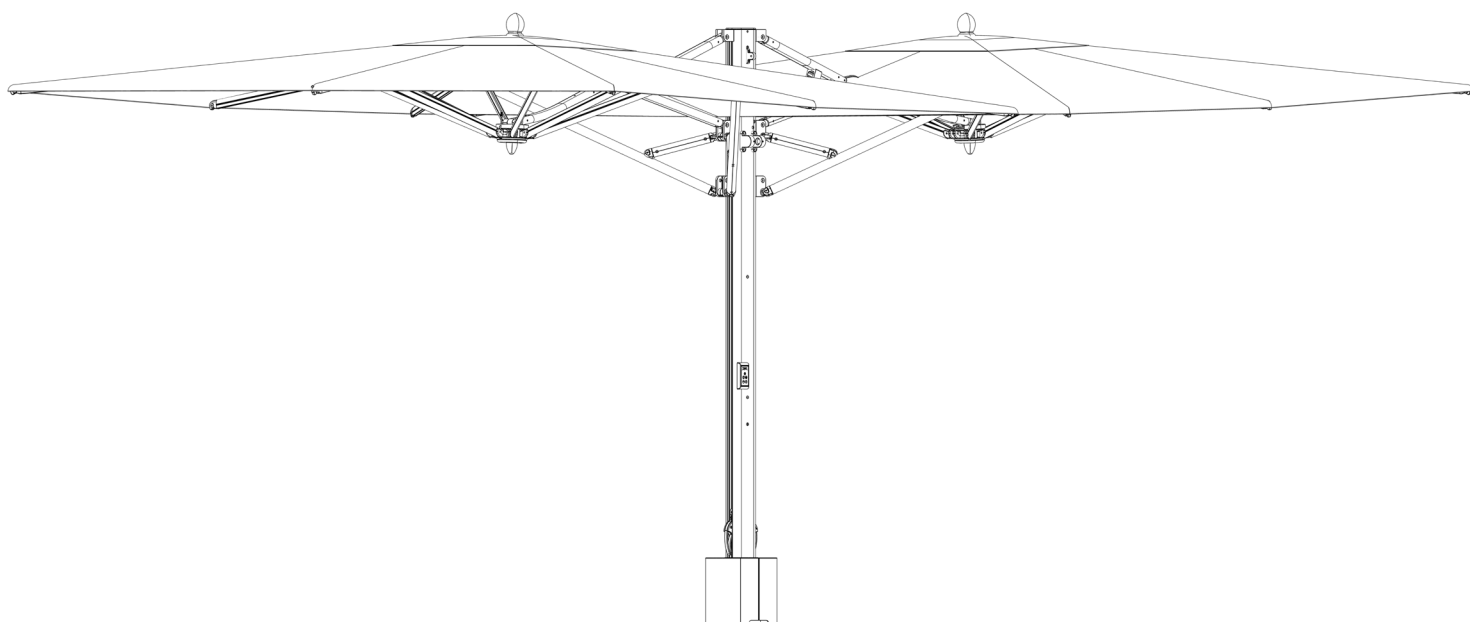

To protect your product, please read the operating instructions before opening the parasol.


AMBIATM LED LIGHT | AUTOMATION

Step 1

Remove all packaging from in and around parasol.

Step 2


Pull pin from cam lock and lift the handle to unlock parasol.

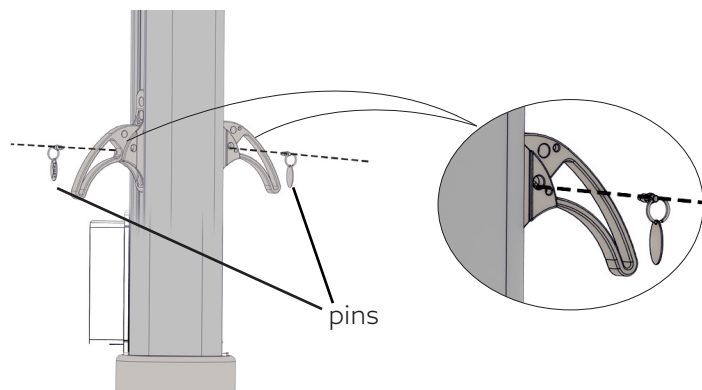

Step 3


Once you have leveled the stem using the anchor installation instructions, slide the beauty cover and parasol over the security stem (security stem is included with parasol).

Note: Ensure that cables are not pinched when inserting the parasol over the security stem and when installing the beauty cover.

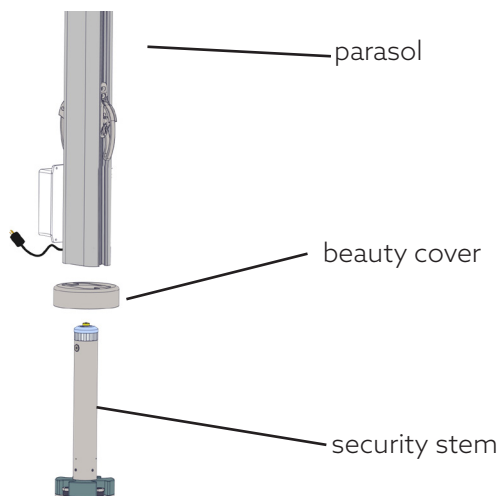

Step 4

Lock parasol down by pushing the cam lock handles in the down position and lock with pins. Mount beauty covers over control boxes.

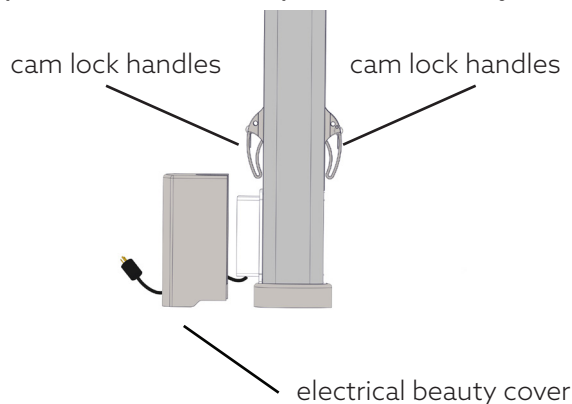

AMBIATM LED LIGHT | AUTOMATION

Mounting dual canopy frame


Step 5

For shipping purpose trolley carts are tighten with elastic rope. Remove protective bubble wrap and elastic rope.

Step 6

Install 2nd canopy frame by using the 3/8" bushings and screws.

Note: Add a drop of provided loctite to the end of the screw threads.

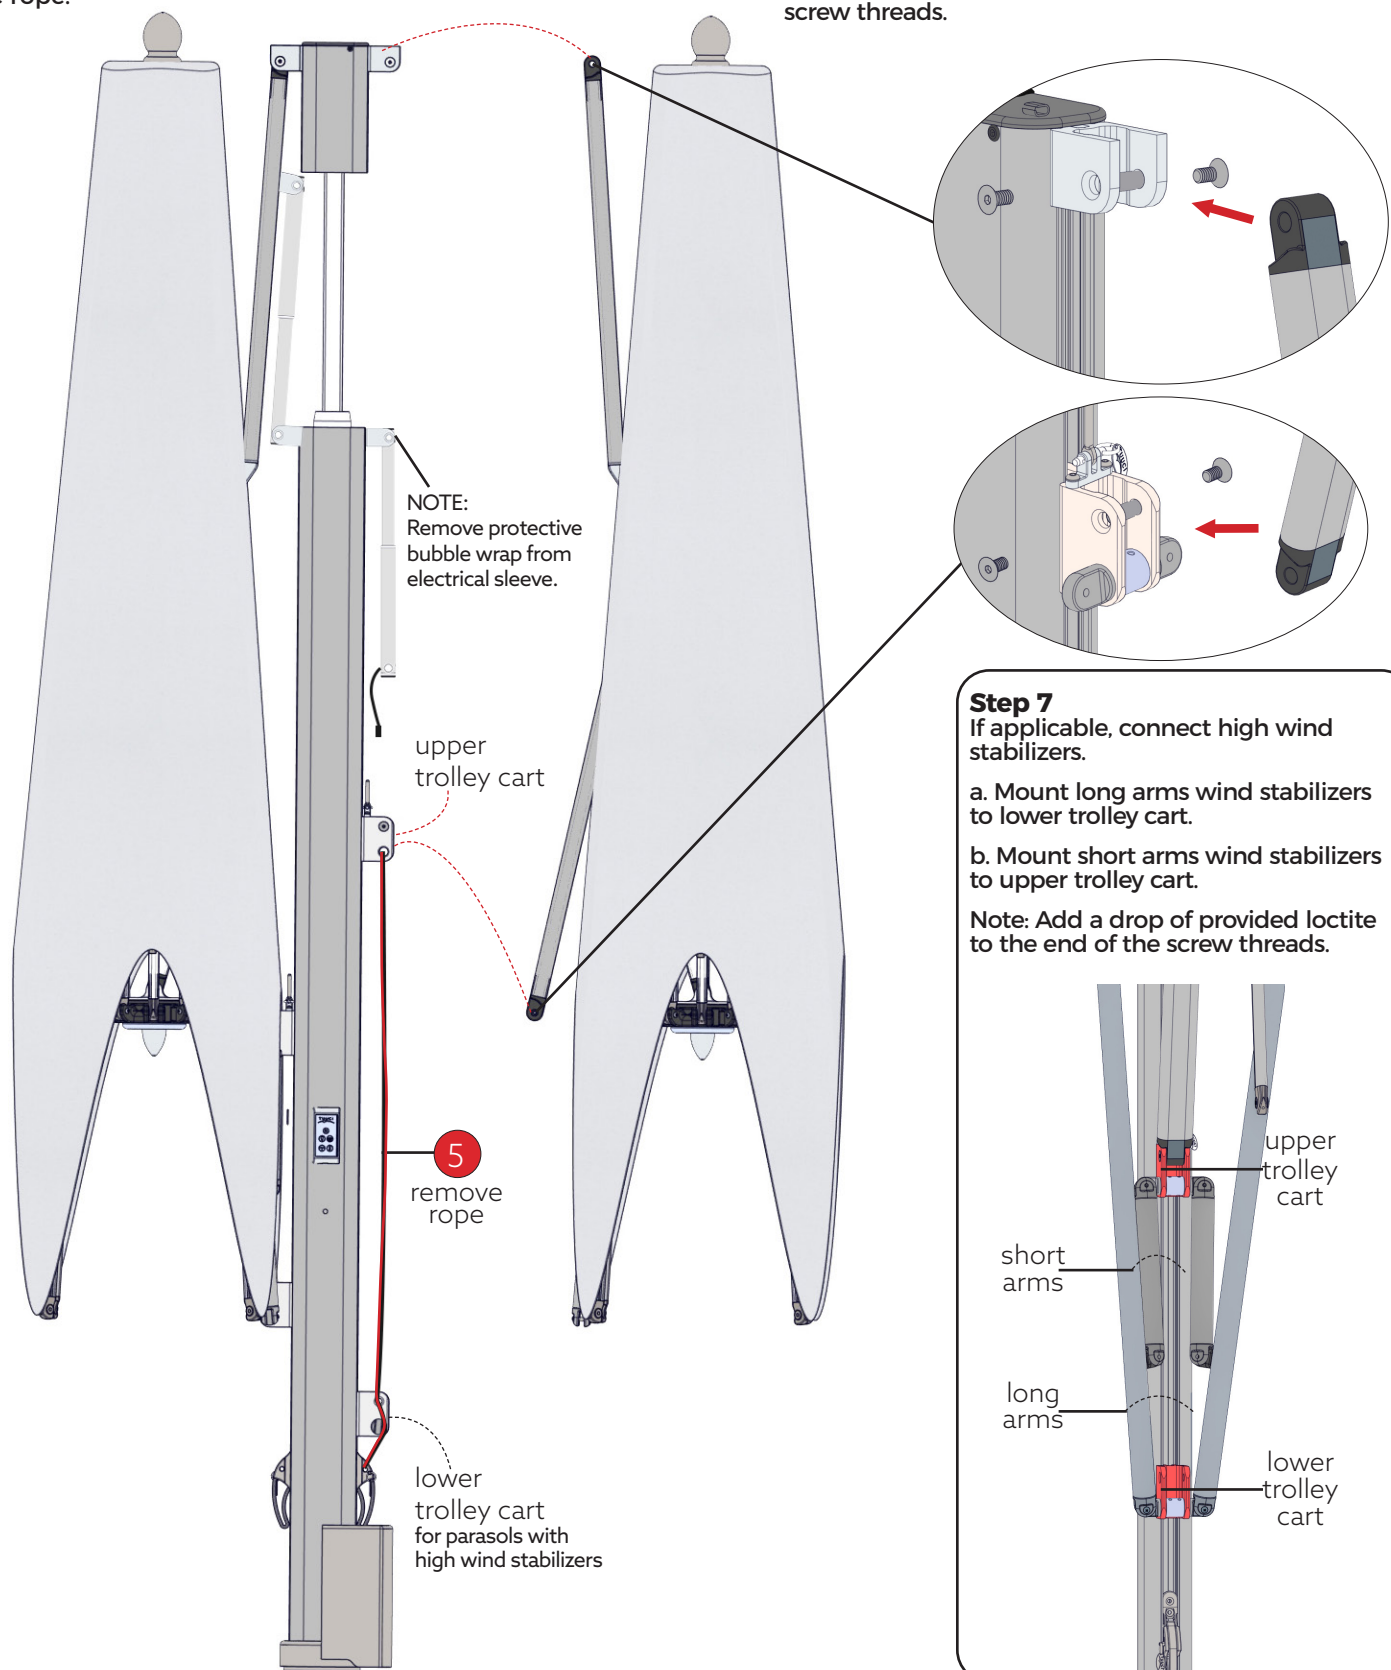

AMBIATM LED LIGHT | AUTOMATION

Electrical sleeve connection

Step 8


Mount electrical sleeve to scissor bracket with 3/8" bushing and 3/8"-16 flat head screw.

Note: Add a drop of provided loctite to the end of the screw threads.




electrical sleeve

scissor bracket

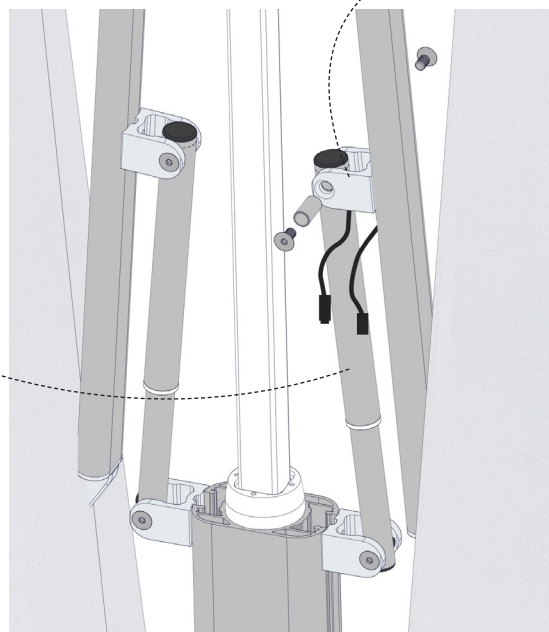

Step 9

Connect cable from electrical sleeve to scissor cable.


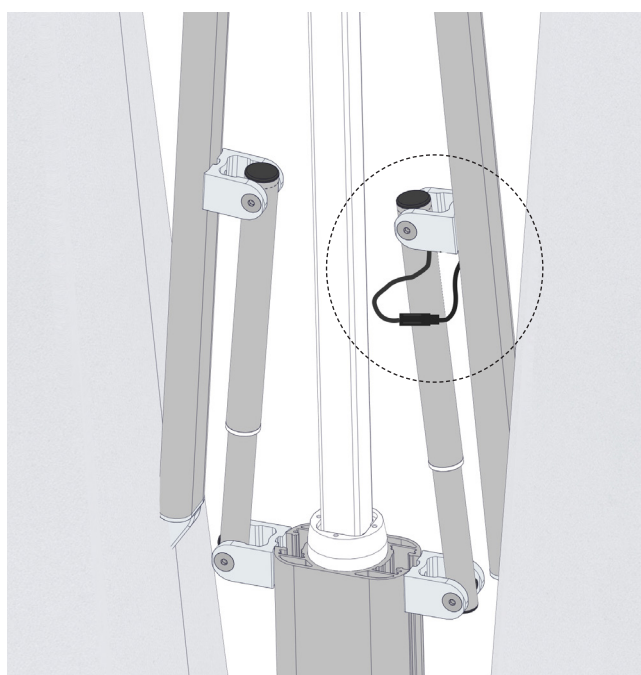


Step 10

Push in cable and connector through scissor grommet hole.

scissor grommet hole

push connector inside scissor arm

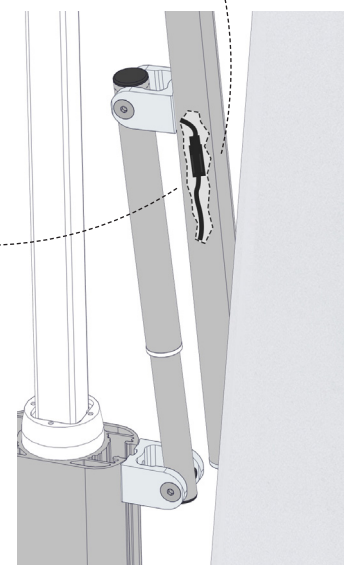

AMBIATM LED LIGHT | AUTOMATION



Step 11

Plug in your automated parasol into a 110V receptacle. The Tuuci logo on the user control panel will be backlit in white, when the parasol is properly plugged into the power source.



Step 12

Press the Power button to turn on the parasol. The button will be backlit in red when the power is ON. In addition, when the parasol is ON, the open parasol icon, the closed parasol icon and the light icon will be backlit in white.




Step 13

Press the close parasol button to move both parasol canopies to connect the eye of the cable connector with scissor's cart.


Please follow the steps below:

- While the parasol is closing, keep firm tension on the cable connector.
- Pull the security pin from the trolley car bracket.
- Pull the cable connector so it aligns with the trolley car bracket.
- Fasten the cable connector to the trolley bracket with the security pin.

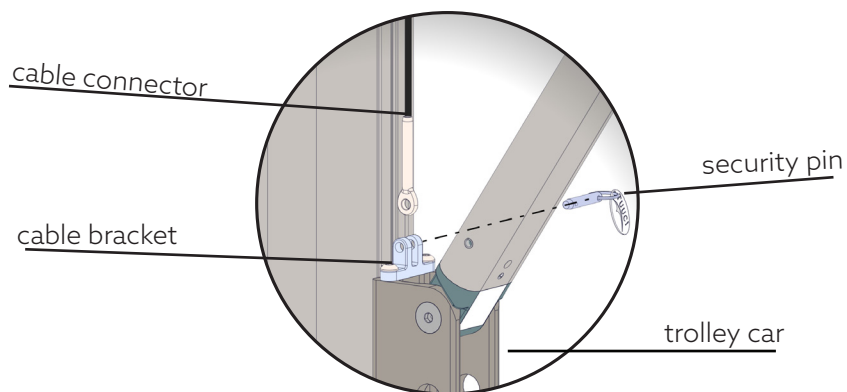

Step 14

For each canopy, gently separate each individual rib approximately 10 inches from the center hub. If the rib does not move easily, do not force. Inspect the product for additional packaging.

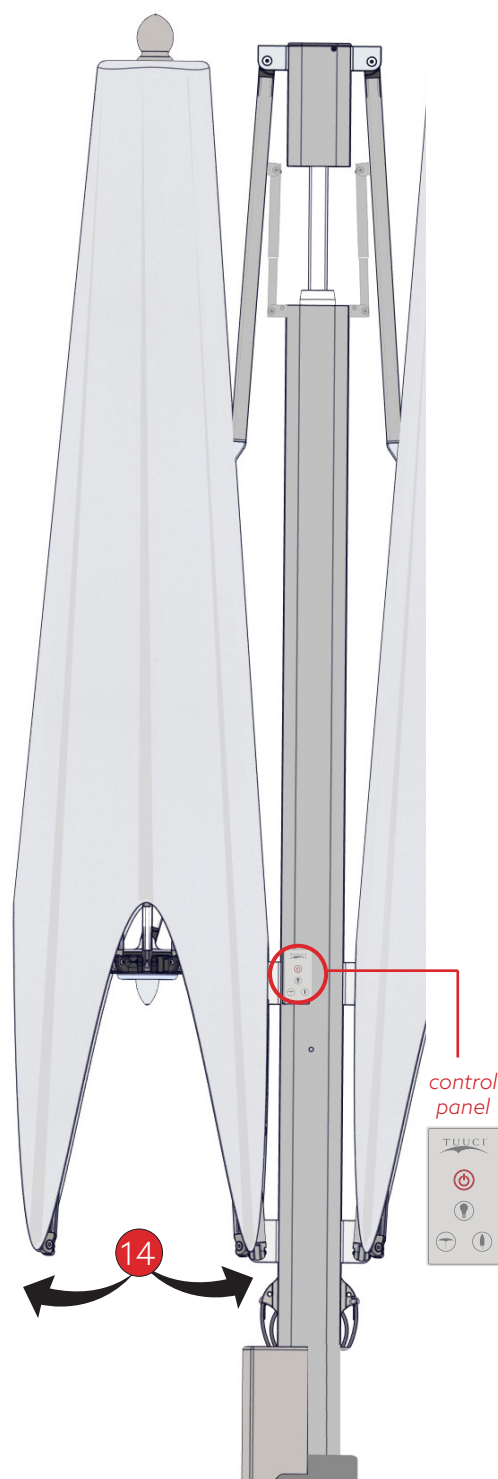

CAUTION

Ensure that your parasol is level (not tipped or tilted). For safety reasons, If the parasol is tipped, you will not be able to open or close the parasol and/or turn-on the Ambia LED lights.

Ensure that there is nothing blocking the canopies of the parasol from being fully opened. For safety purposes, the motor has a built-in stop feature if the canopy bumps into an object, when opening or closing.

AMBIATM LED LIGHT | AUTOMATION

Opening the parasol canopies



Opening parasol canopies


Press the open parasol icon button to open both parasol canopies. The color will change from white to blue after pressing the button and during the opening of the parasol canopies.

When both canopies are fully opened, the button color will change to white. The parasol must be fully opened for 5 seconds before the ambia led lights can be turned on.



Turning the Ambia LED light on

Press the light bulb icon button to turn-on both ambia led lights under each canopy. The color will change from white to blue after pressing the button, signaling that the lights are on.

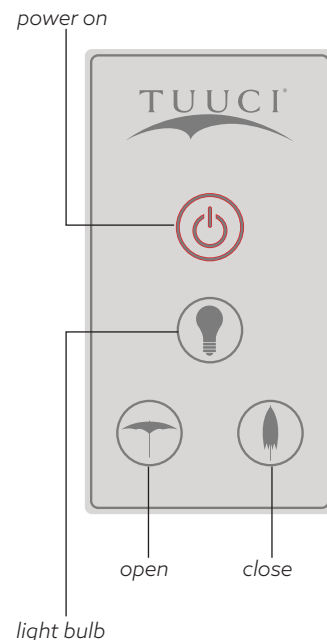

Closing the parasol canopies and turning off the Ambia LED Lights



Step 1

Press the light bulb icon button to turn-off both Ambia LED lights. After pressing the button, the color will change to white, signaling that the lights are OFF.



Step 2

Press the close parasol icon button to close both parasol canopies. After pressing the button, the color will change from white to blue, signaling that the parasol canopies will be closing.

When the parasol canopies are fully closed, the close parasol icon color will change to white.



Step 4

Close the parasol with tie-back when not in use.

Note: Close parasol during consistent wind conditions that exceed 25mph.

AMBIATM LED LIGHT | AUTOMATION



Emergency shut-down or interrupt feature on the automated parasol control panel

Press the Power button to shut-down or interrupt the operation of any function (Ambia LED lights, open and close). The red light on the Power button will turn OFF. The light icon and open and close icon buttons will turn OFF. Press the Power button to turn the parasol back ON.



Control panel indicator when the automated parasol is not level (tipped or tilted on an angle)

The Power button will be flashing in yellow when the parasol is not level. All functions (open, close, Ambia LED light) are inactive. The TUUCI logo is not backlit. When the parasol is level and no longer tipped or tilted, it will return to a powered down state with the TUUCI logo backlit in white and all other functions OFF. Press the Power button to turn-on the parasol. Then, turn-on the various functions.



Lock-out unauthorized users from turning-on or -off various features of the automated parasol

There is a lock-out feature to prevent unauthorized user access. To turn-on the lock-out feature, press and hold the Power button for 5 seconds. All functions (Ambia LED lights, open and close) will maintain their original state of ON or OFF. The power button will be a solid yellow when the lock-out feature is activated.

To turn-off the lock-out feature, press and hold the Power button for 5 seconds. All functions (Ambia LED lights, open and close) will maintain their current state of ON or OFF. Users will have access again to turn ON-OFF the various functions.



Closing the automated parasol if there is an extended power outage

The automated parasol comes standard with a 12V back-up battery. Unplug power cord and remove the beauty cover that conceals the control box. Plug the battery into the control box. The 12 VDC Battery will provide power to open or close the parasol and to Turn ON / OFF the Lights, when the AC power source is not available. Parasol must be fully open to activate the Lights. The heaters cannot be activated by the back-up battery.



(2) Light Units and Automation Electrical Specs:

This dual canopy parasol requires only one electrical circuit.

Power Supply:	
Main Input Voltage:	110VAC - 240VAC 50/60 Hz
Max. Amps:	0.63A @110 Volts AC 0.29A @240 Volts AC
Max. Watts:	70 Watts

North America version:

110-240V, 1 phase 60Hz (requires a minimum 10 Amp circuit)
Parasol comes with 10ft Power Cord & Plug
(Use with 15A - 110 Volts, NEMA 5-15R Receptacle compatible with NEMA 5-15P Plugs)

Europe version:

110-240V, 1 phase 50Hz (requires a minimum 5 Amp circuit)
Parasol comes with 10ft Power Cord & Plug
(Use with 16A - 250 Volts, Schuko Receptacle compatible with Schuko 16A - 250 Volts Plug)

Customer must connect to a protected power source circuit with proper Current Rating "Amps", near the parasol, using an above ground Junction box, according to their local electrical codes and regulations.

Warnings & safety instructions

1. Read and understand entire owner's manual before assembling or operating parasol.
2. Read and understand the warnings posted on the parasol and/or components installed on the parasol.
3. Disconnect electrical power to parasol during inclement weather.
4. Keep children away from power cords on or around parasol.
5. Disconnect power before removing or servicing parasol.
6. Do not use this parasol for other than its intended use.
7. Replace warning labels if they become obscured or removed.
8. Make sure the parasol is properly electrically grounded.
9. Provide for adequate space to open and close parasol without obstructions.
10. Customer's electrical power source connections if any, are to be installed / connected by a certified electrician. check local codes for guidance.
11. When closing / opening parasol keep hands and face clear of all pinch points, or protruding parasol components.

for frequently asked questions visit tuuci.com/automationCL