

INSTALLATION INSTRUCTIONS

OCEAN MASTER MAX DUAL CANTILEVER

AMBIATM LED LIGHTS | AUTO-LOC-LIFT



TO PROTECT YOUR PRODUCT, PLEASE READ THE OPERATING INSTRUCTIONS BEFORE OPENING THE PARASOL.


AMBIATM LED LIGHTS & AUTO-LOC-LIFT

STEP 1

REMOVE ALL PACKAGING FROM IN AND AROUND PARASOL.


STEP 2

PULL PIN FROM CAM LOCK AND LIFT THE HANDLE TO UNLOCK PARASOL.

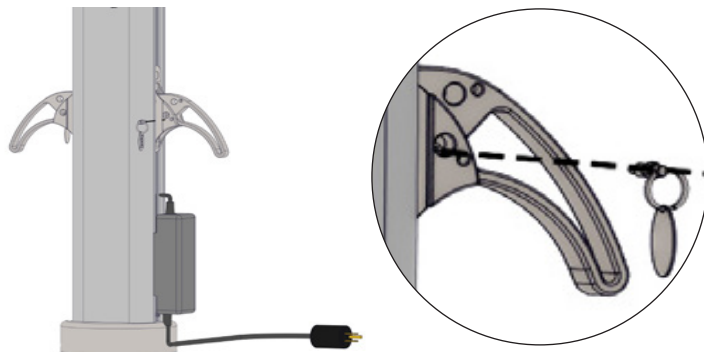


STEP 3

ONCE YOU HAVE INSTALLED AND LEVELED THE STEM USING THE ANCHOR INSTALLATION INSTRUCTIONS, SLIDE THE BEAUTY COVER AND PARASOL OVER THE SECURITY STEM (SECURITY STEM IS INCLUDED WITH PARASOL).

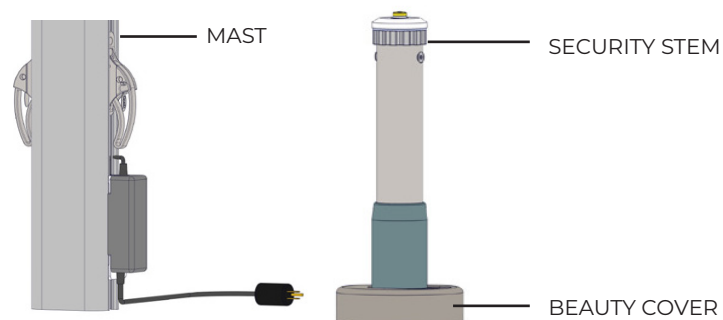

STEP 4

LOCK PARASOL DOWN BY PUSHING THE CAM LOCK HANDLE IN THE DOWN POSITION AND LOCK WITH PIN.

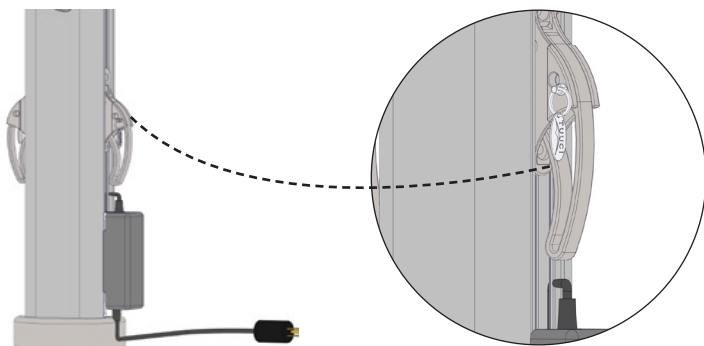


AMBIATM LED LIGHTS & AUTO-LOC-LIFT

STEP 5

INSTALL 2ND CANOPY FRAME BY USING 3/8 BUSHING AND SCREWS.


NOTE: ADD A DROP OF PROVIDED LOCTITE TO THE END OF THE SCREW THREADS.

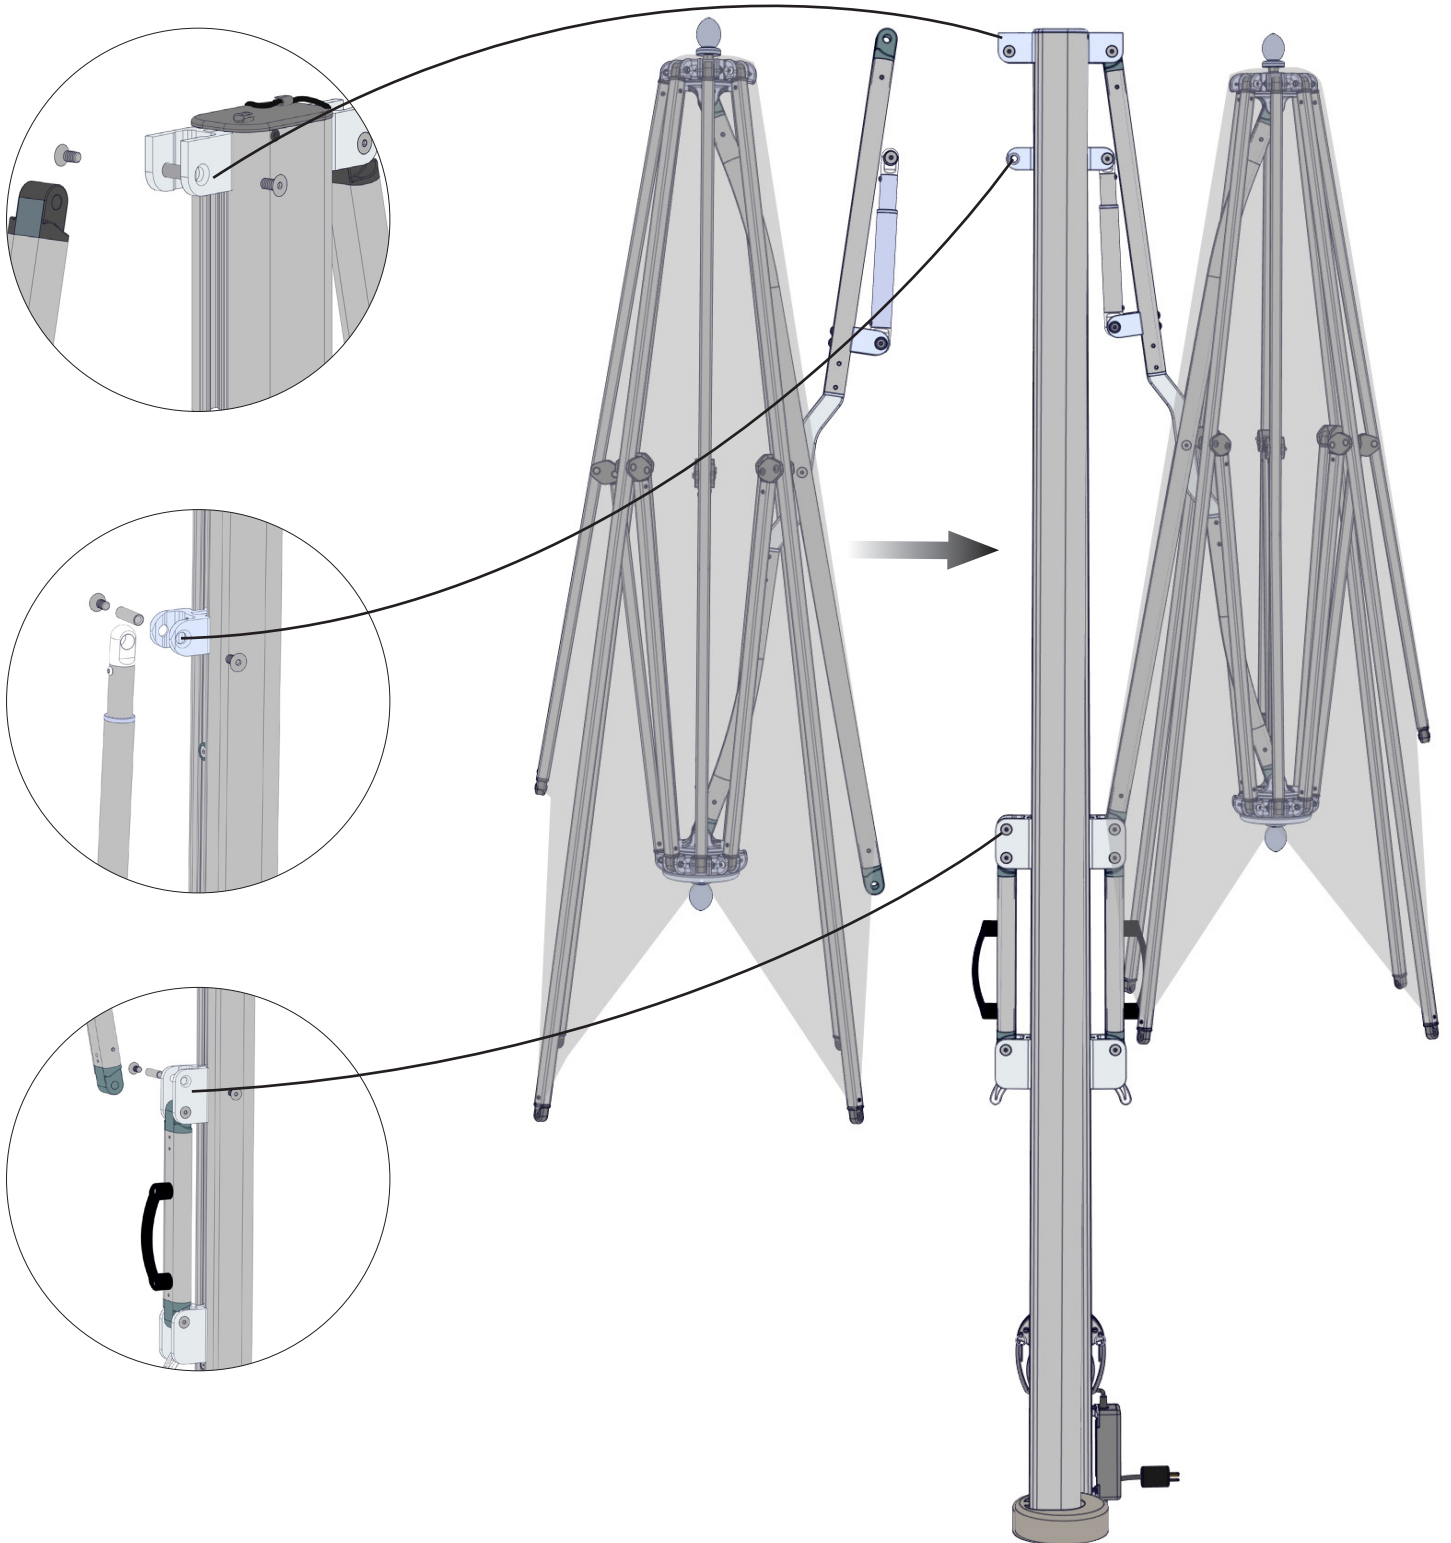

AMBIATM LED LIGHTS & AUTO-LOC-LIFT


STEP 6

REMOVE CAP SCREW AND MAST CAP AND CLIP.

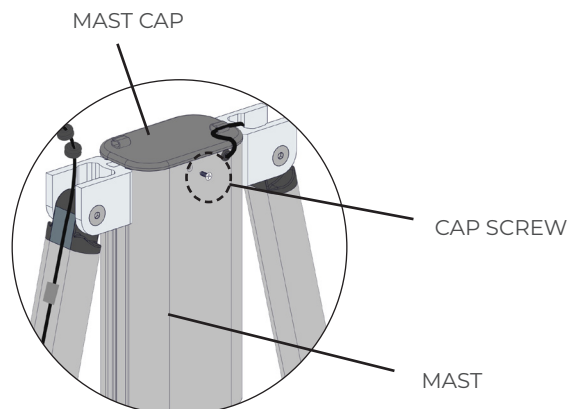



STEP 7

CONNECT MALE AND FEMALE LIGHT CONNECTORS.

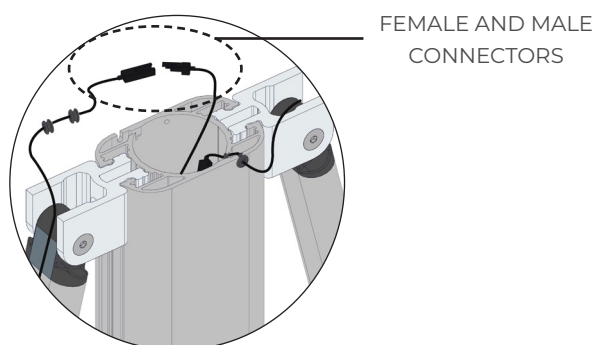

Step 8

INSERT 1ST GROMMET ON INNER MAST GROOVE BY RUNING CABLES THROUGH CLIPS.

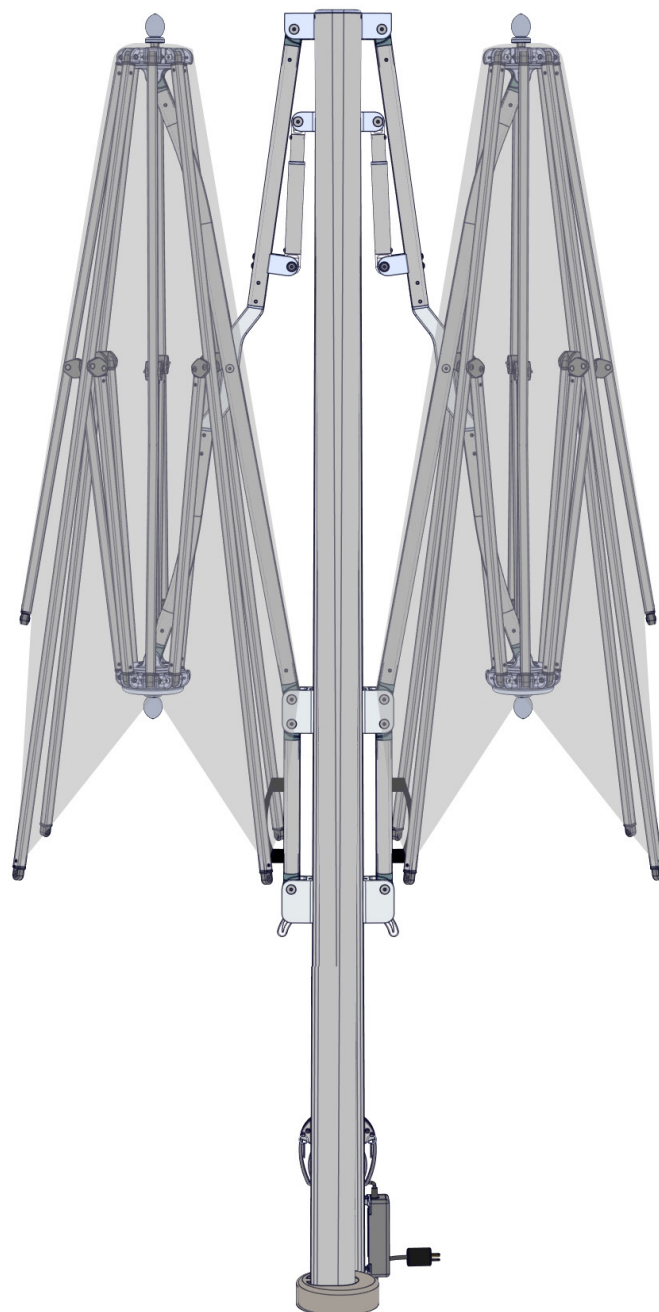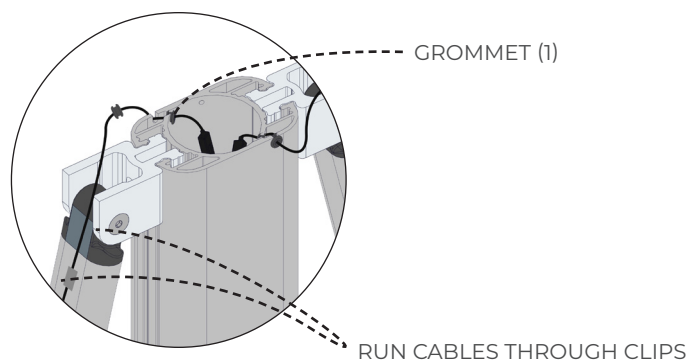

AMBIATM LED LIGHTS & AUTO-LOC-LIFT

STEP 9


INSERT 2ND GROMMET ON OUTER MAST GROOVE AND RUN CABLE THROUGH CLIPS.

STEP 10

RE-INSTALL CAP AND SCREWS.


STEP 11

GENTLY SEPARATE EACH INDIVIDUAL RIB FROM CENTER HUB APPROX. 10 INCHES. IF RIB DOES NOT MOVE EASILY, DO NOT FORCE. INSPECT PRODUCT FOR ADDITIONAL PACKAGING.

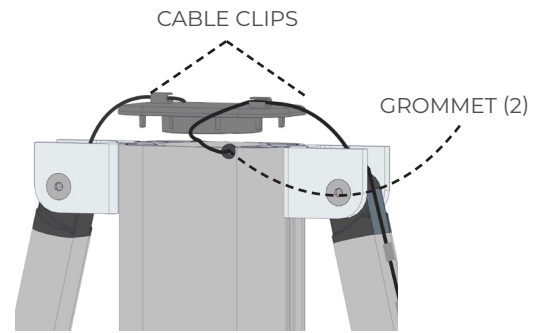


TO OPEN PARASOL

TO OPEN PARASOL, UNLOCK THE CART LOCK LEVER AND PUSH CART HANDLE UP UNTIL IT LOCKS.

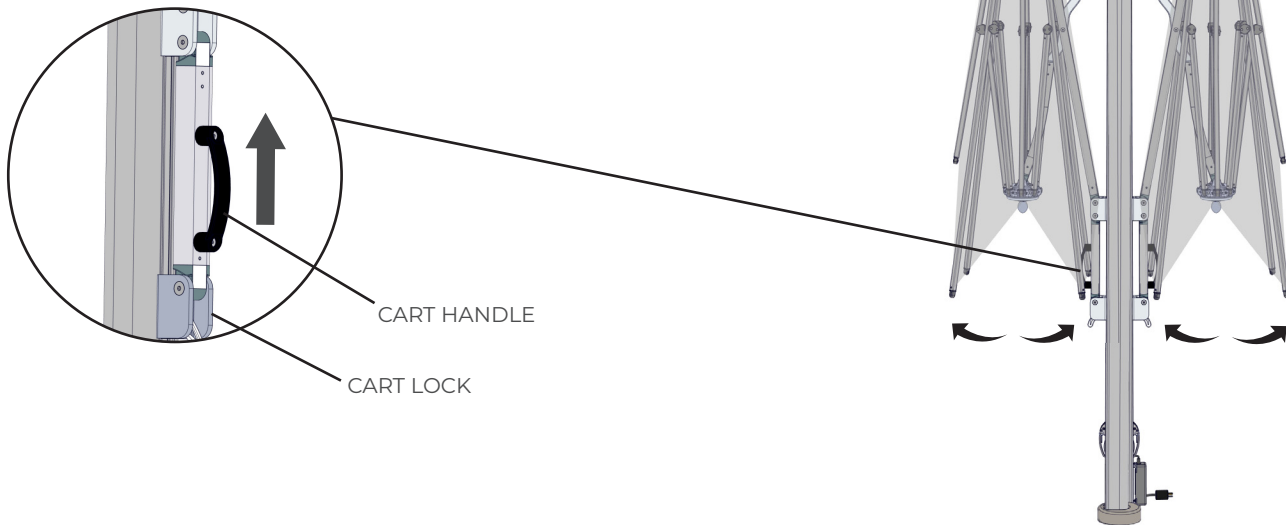

TO CLOSE PARASOL

TO CLOSE PARASOL, UNLOCK THE CART LOCK LEVER BY PUSHING CART HANDLE UPWARDS AND PUSHING CART LOCK LEVER IN. THEN, SLIDE DOWN THE CART BY PULLING DOWN THE CART HANDLE.

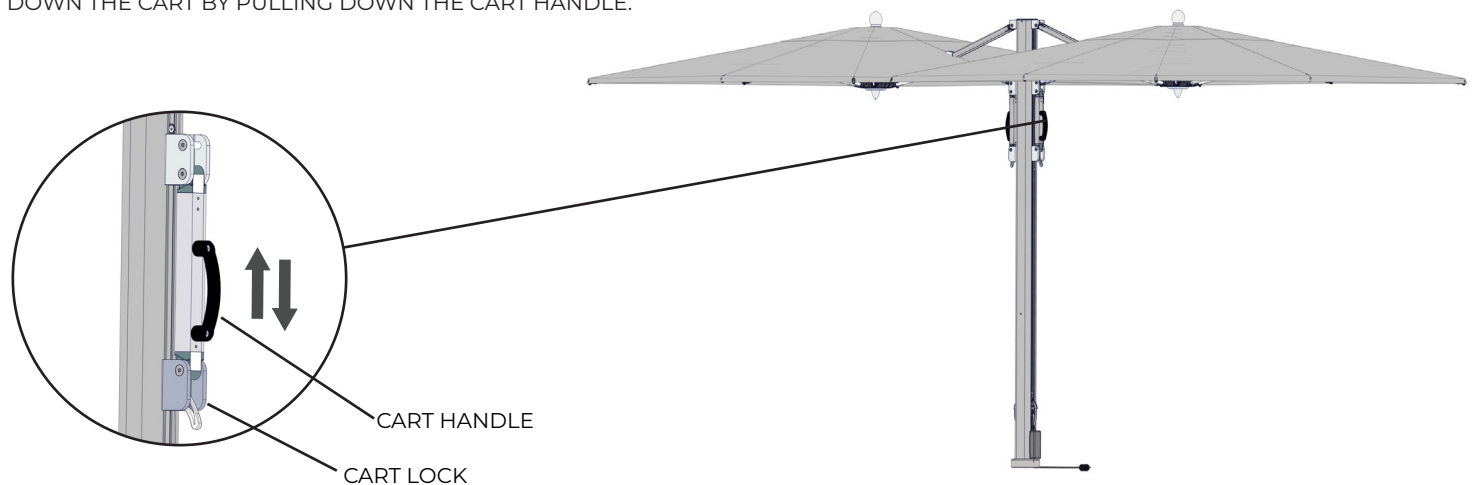

AMBIATM LED LIGHTS & AUTO-LOC-LIFT

ELECTRICAL SYSTEM


STEP 1

CONNECT THE ELECTRICAL CORD TO THE OUTLET.

STEP 2

TAP PLATE ABOVE THE FINIAL ONCE TO POWER ON-OFF, OR TOUCH AND HOLD FOR LIGHT DIMMING CONTROL.

Power Supply:	
Input Voltage	90 - 305VAC
Input Current	0.6A / 115VAC 0.3A / 230VAC
Output Voltage	12 VDC

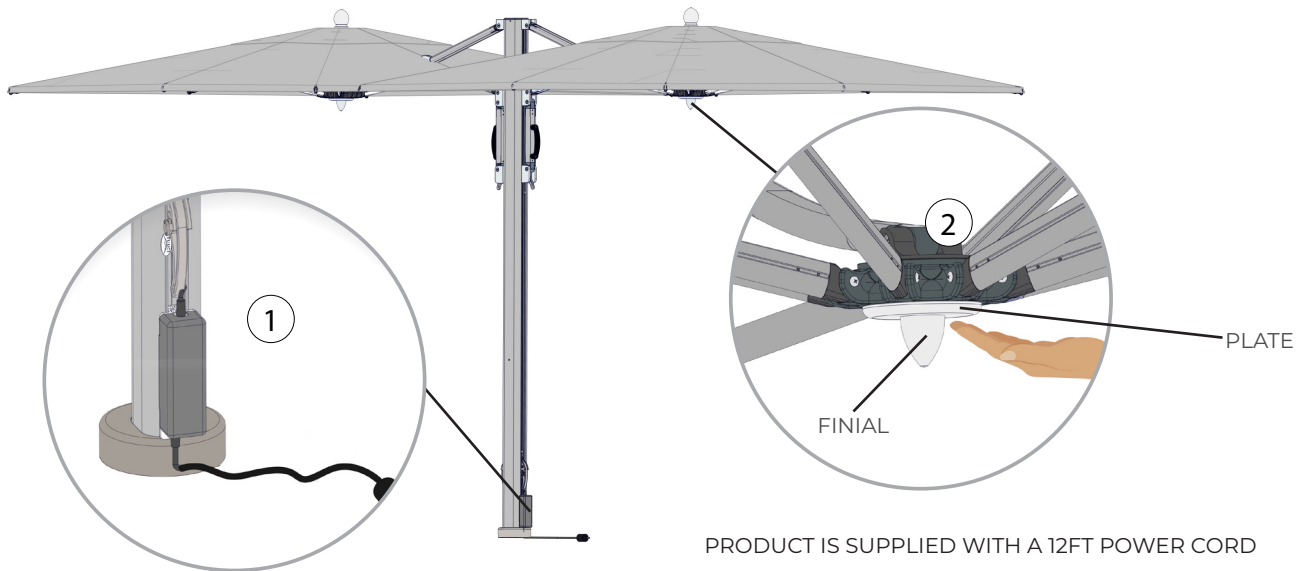

WHEN NOT IN USE, THE CANOPY SHOULD BE CAREFULLY FOLDED AND SECURED WITH THE TIE-STRAP.

NOTE: CLOSE PARASOL DURING WIND CONDITIONS THAT EXCEED MANUFACTURER'S SPECIFICATIONS.

